On TAE's Path to Fusion

A Private-Sector Perspective

Michl Binderbauer | President & CTO | TAE Technologies

Committee on a Strategic Plan for US Burning Plasma Research, General Atomic, Feb 26-28, 2018

Agenda

- Concept, Motivation and History
- Key Past Program Accomplishments
- Current Status and Next Steps
- Overall Perspective Forward – Public-Private Partnership

TAE Concept

Advanced beam driven FRC

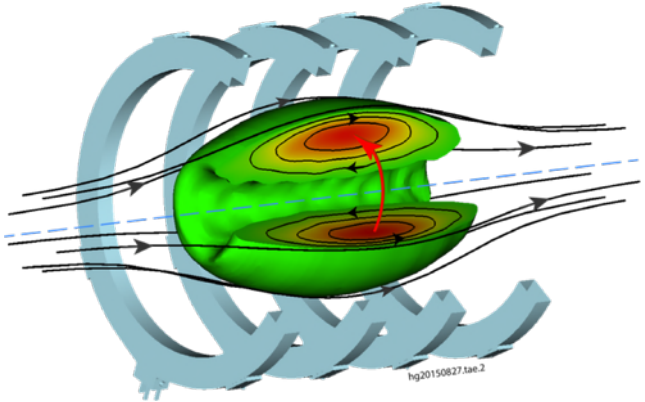



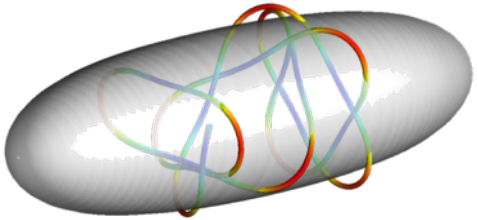

- High plasma β~1
  - compact and high power density
  - aneutronic fuel capability
  - indigenous kinetic particles
- Tangential high-energy beam injection
  - large orbit ion population decouples from micro-turbulence
  - improved stability and transport
- Simple geometry
  - only diagmagnetic currents
  - easier design and maintenance
- Linear unrestricted divertor
  - facilitates impurity, ash and power removal

tae

Goals, Issues and Initiatives for FRC Research

FESAC TAP report (2008) & ReNeW (2009)

Long-range mission

- Develop compact (high-β) reactor without toroidal field coils or a central solenoid

ITER era goal

- Achieve stable, long-pulse keV plasmas with favorable confinement scaling

Key issues

- Is global stability possible at large s ($a/\rho_i \geq 30$) with low collisionality?
- What governs energy transport and can it be reduced at high temperature?
- Is energy-efficient sustainment possible at large-s and with good confinement?
- Theory and simulation challenges (high-β, kinetic effects, transport)

Suggested possible initiatives

- Build larger facility with rotating magnetic fields or neutral beam injection (NBI)
- Develop comprehensive diagnostics suite (profiles, fluctuations, …)

tae

TAE's Goals to Now

Test for failure early and at lower cost while reducing most critical risks

Establish beam driven high-β FRC physics test beds to

- provide fast learning cycles and large experimental dataset (close to 60,000 shots)
- demonstrate sustainment via Neutral Beam Injection (NBI) for >5 ms discharges (longer than critical timescales) with high repeatability
- study tangential NBI and fast particle effects on stability and transport
- measure scaling and study fluctuations and transport
- assess potential for current drive, power balance and its implications

Provide opportunity to

- tightly integrate theory/modeling with experimentation
- develop engineering knowhow and integration

Invite collaboration to accelerate progress

- Budker Institute, PPPL, UCI, UCLA, LLNL, Univ. of Pisa, Univ. of Wisconsin, Nihon Univ., Univ. of Washington, Google, Industrial partners

tae

Past TAE Program Evolution



A & B – Basic FRC core

- 100-800 G, 5-10 eV
- ion beams, W_b ~0.1 kJ

C-2 – HPF* w/ 2 guns, Ti getter

- 1 kG, 1 keV
- neutral beams, W_b ~12 kJ

C-2U – Sustainment 5+ ms

- 1 kG, 1 keV
- neutral beams, W_b ~100 kJ

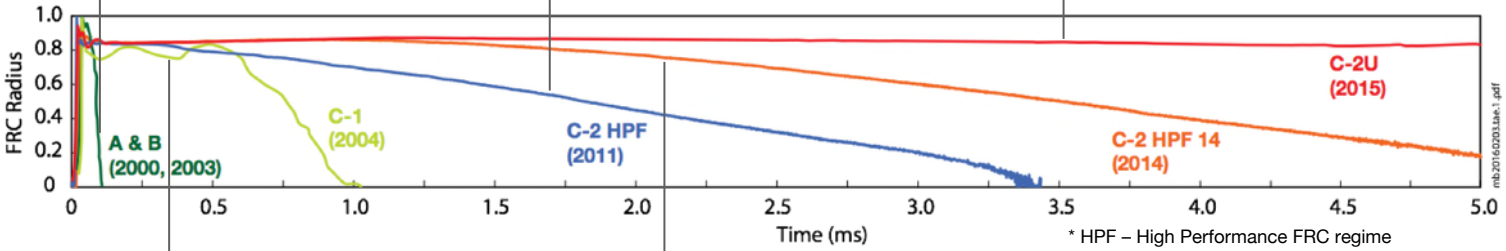

* HPF – High Performance FRC regime



C-1 – Enhanced lifetime

- 400 G, 10 eV
- ion beams, W_b ~1 kJ

C-2 – HPF* w/ 2 guns, Li getter

- 1 kG, 1 keV
- neutral beams, W_b ~20 kJ

Key Past Program Accomplishments

Global Stability Control via Edge Biasing

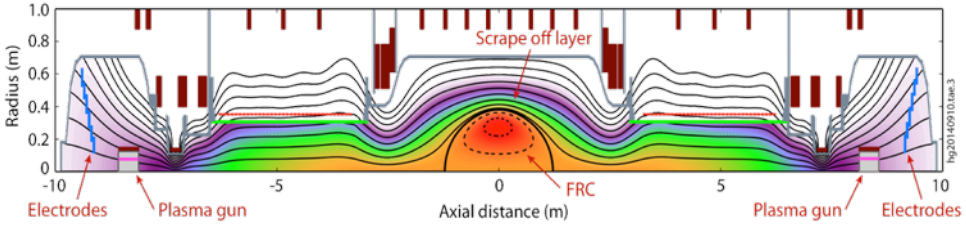

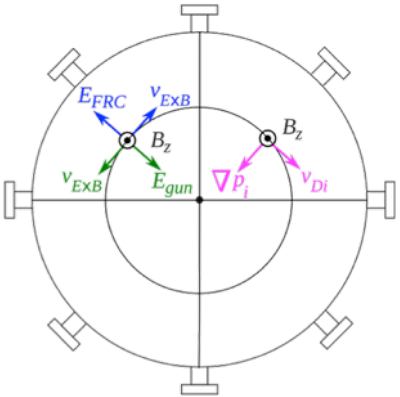

Bias: On/Off

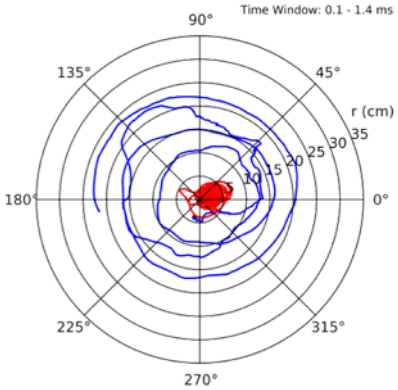

Plasma Gun: On/Off

- Active and passive bias electrodes "communicate" with FRC separatrix via scrape-off layer
- Generate inward E_r to counter FRC spin-up, and stabilize rotational modes (e.g. n=2) in axisymmetric way
- Line-tying between FRC and plasma gun stabilizes wobble (provided that sheath resistance is low)

Binderbauer, et. al, Phys. Plasmas 22, 056110 (2015)

tae

Advanced Beam Driven FRC Enabled by Fast Ions

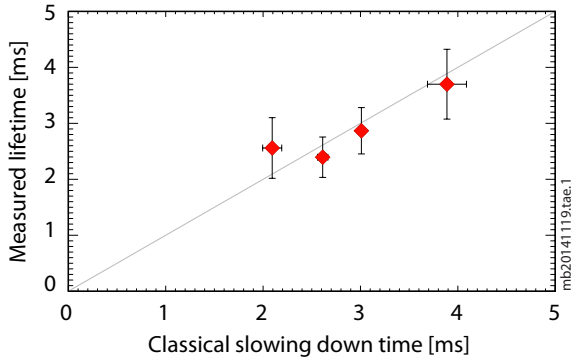

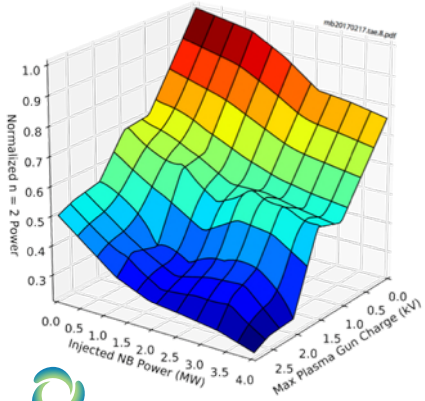

- Fast ion confinement near classical limit $\chi_i \sim (1\text{-}2)\ \chi_{icl}$
- Total pressure is maintained, while thermal pressure is replaced by fast ion pressure, up to $P_{fast}/P_{th} \sim 1$
- Global modes are further suppressed
- Lifetime increases with NBI

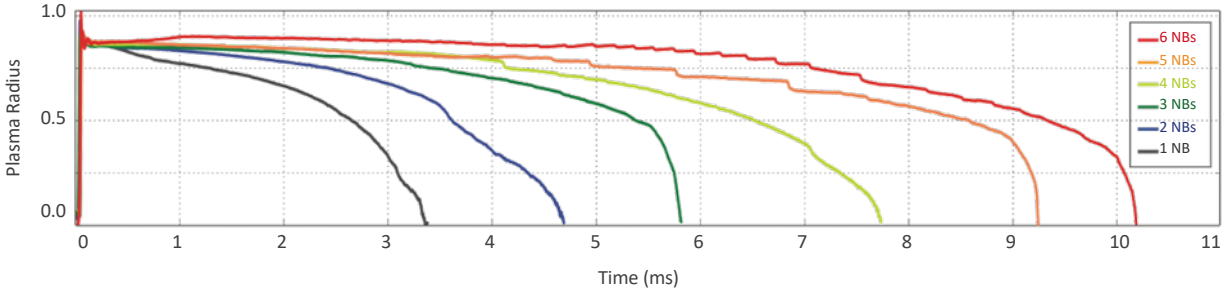

Binderbauer, et. al, Phys. Plasmas 22, 056110 (2015)

FRC Sustainment Correlates with NBI

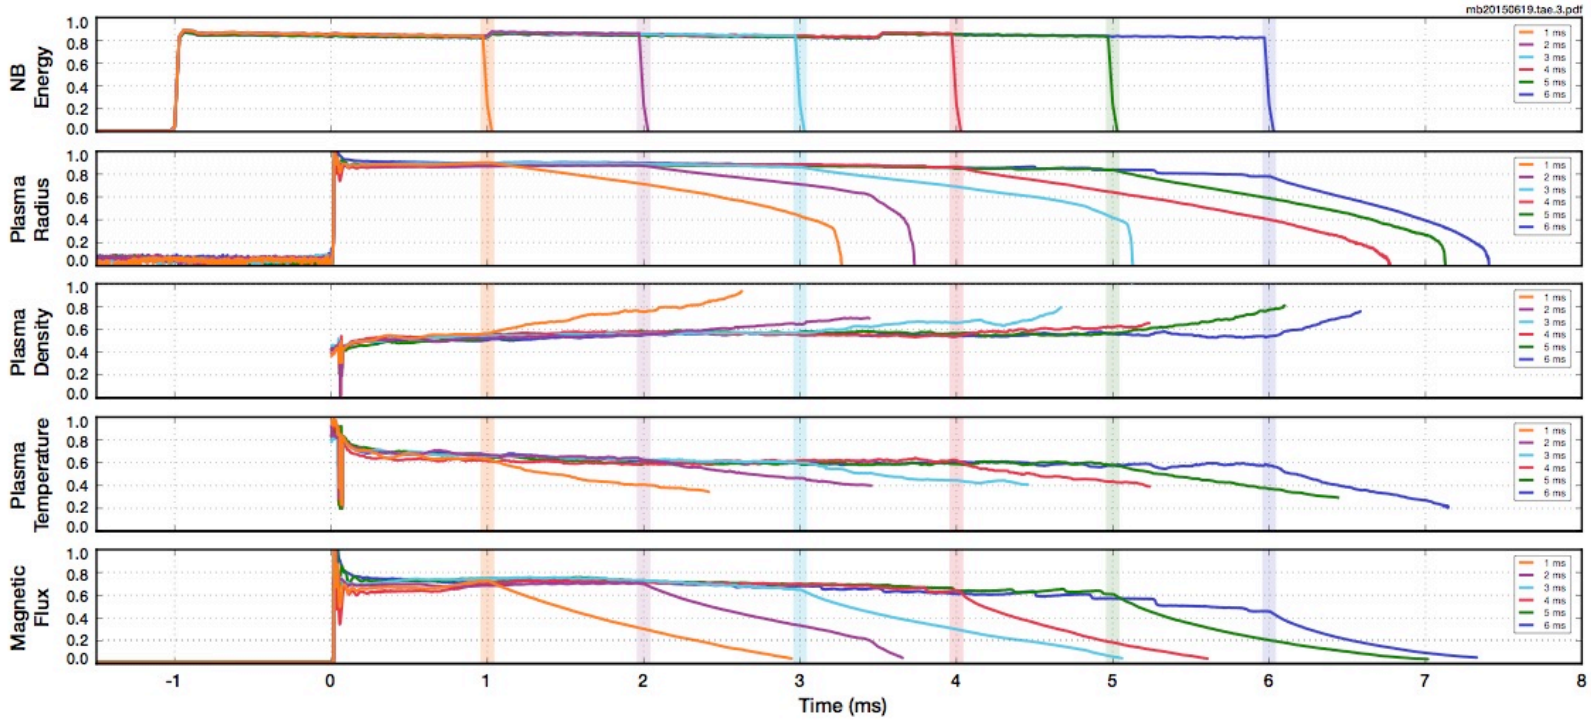

- Pulse length limited by hardware and stored energy supply (biasing, beams)
- Flux maintained up to at least 5-5.5 ms – showcases ability to drive current

M. Binderbauer, et. al, AIP Conf. proceedings 1721, 030003 (2016)

Driftwave Stable Core, Unstable Scrape-off layer

Density fluctuation
(experiment)*

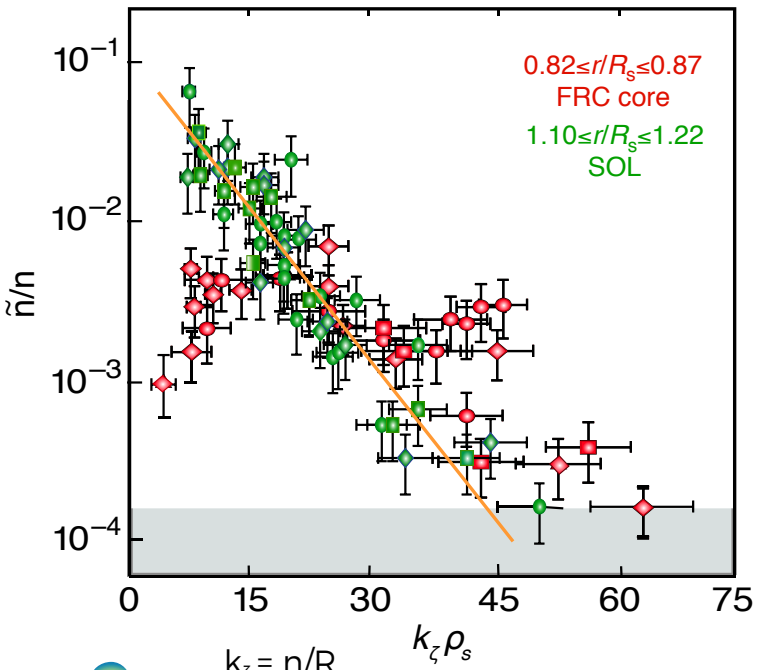

$k_\zeta = n/R$
$\rho_s = \sqrt{(T_i+T_e)/m_i}$

Linear dispersion
(simulation)

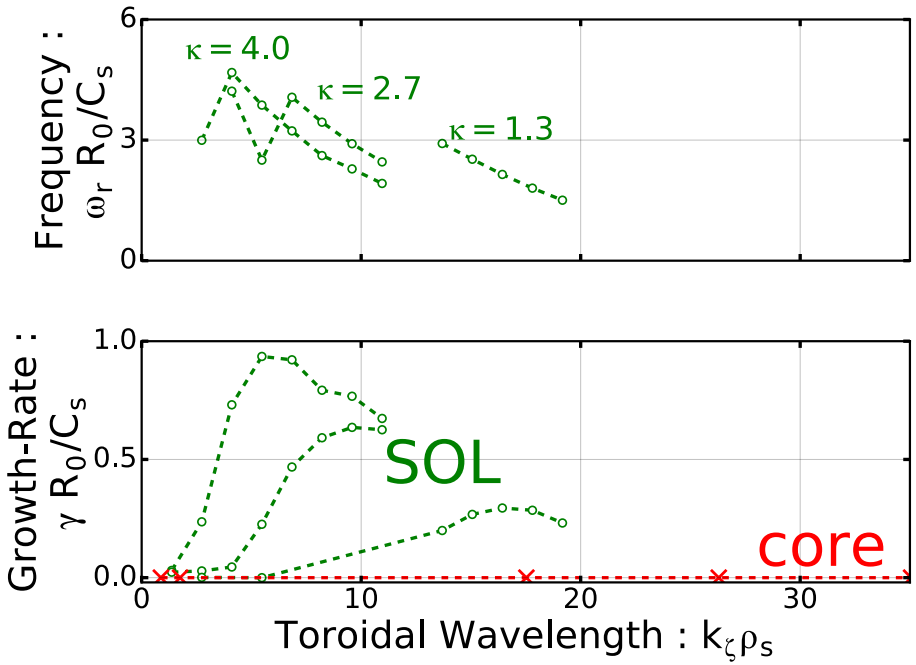

$\kappa = R_0/L_n$ (normalized inverse density scale-length)

Schmitz, et. al, Nat. Comm. 7, 13860 (2016)

Critical SOL Gradient Controls Onset of Fluctuations

Density fluctuation
(experiment)*

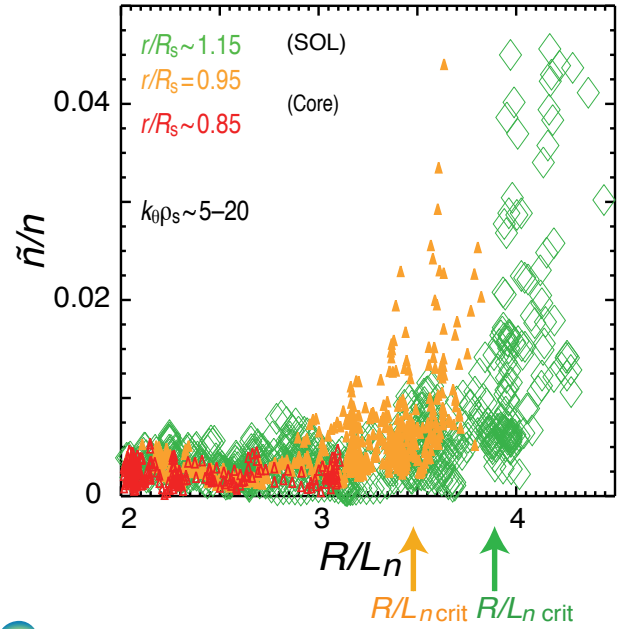

Linear dispersion
(simulation)

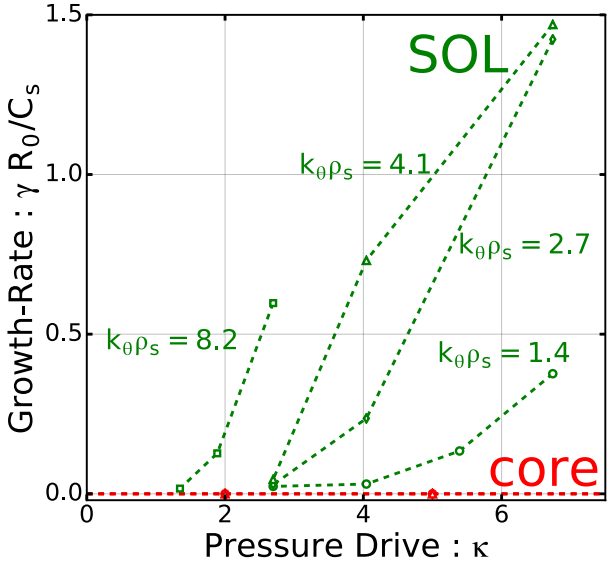

(R_0/C_s = 2.5 μs)

$\kappa = R_0/L_n$ (normalized inverse density scale-length)

Lau, et. al, Phys. Plasmas 24, 082512 (2017)

Fluctuation Suppression via **E×B** Sheared Flow

- Strong E×B shearing rate due to plasma gun biasing
- Sheared E×B flow upshifts critical gradient and reduces turbulence via eddy shearing/decorrelation
- Radial transport barrier at/outside the separatrix

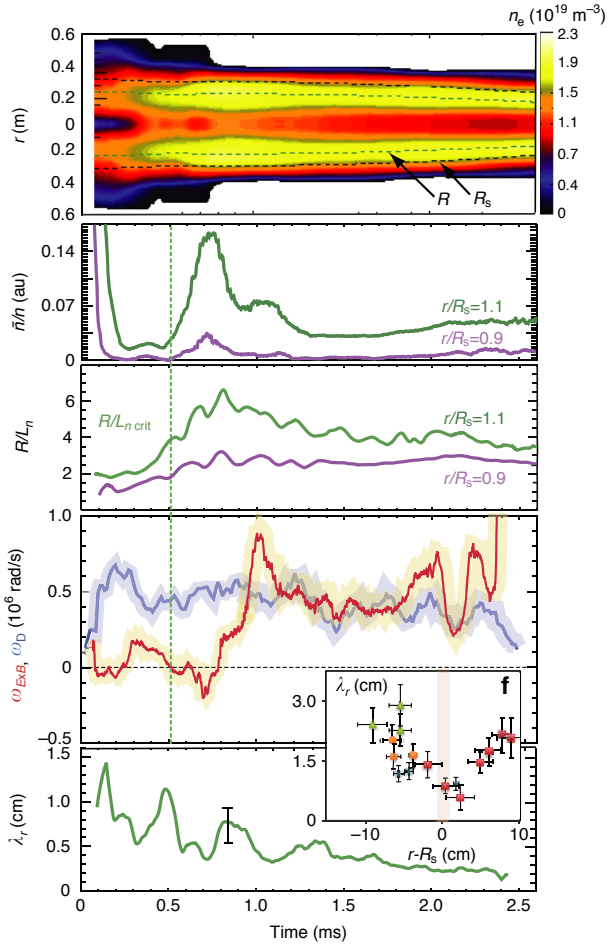

Schmitz, et. al, Nat. Comm. 7, 13860 (2016)

Dramatically Improved Confinement

Binderbauer, et. al, Phys. Plasmas 22, 056110 (2015)

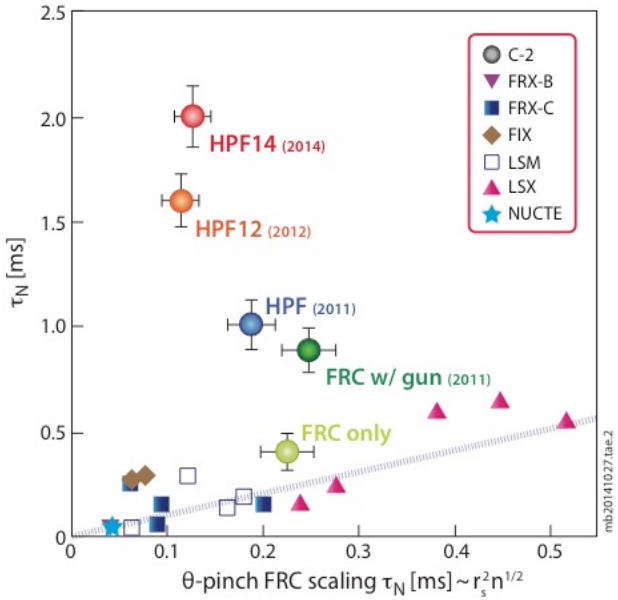

- ~10× improved particle confinement

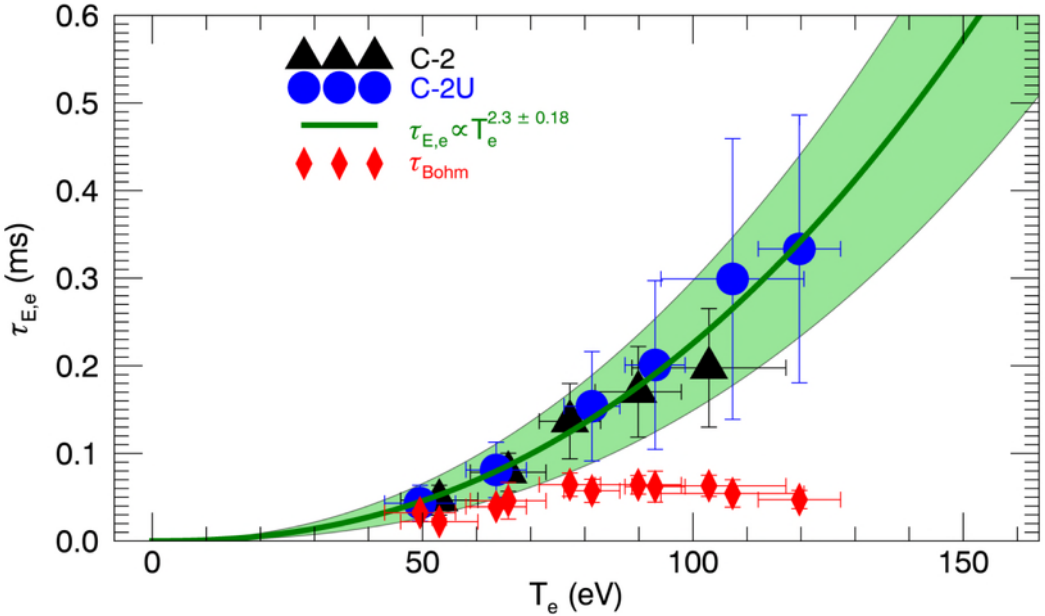

- Strong positive correlation between T_e and τ_{Ee}
- Good fit – $\tau_{Ee} \propto T_e^{2.3}$

Trask, et. al, PBull. Am. Phys. Soc. 61, CP10.00064 (2016)

Past TAE Program Evolution

- Fast ion confinement is close to classical
- Quiescent Core
  - Stabilized by FLR effects, magnetic well, fast electron parallel dynamics
  - Inverted wavenumber spectrum – evidence of FLR stabilization of ion modes – consistent with near-classical core thermal ion transport
  - Some electron-scale turbulence – anomalous electron transport ($\chi_e < 20\ \chi_{cl}$)
  - τ_{Ee} exhibits positive T_e power dependence
- SOL/Edge Fluctuations
  - Fluctuations peak outbound near separatrix, with radial outbound convection
  - Exponentially decaying gyro-scale turbulence up to $k_\theta \rho_s < 50$
  - Critical density gradient controlls onset of density fluctuations
- Core and SOL coupling – SOL turbulence affects FRC confinement
- Evidence of localized flow shear at separatrix creating thermal barrier

Current Status and Next Steps

TAE progress towards fusion

Evolutionary sequence of platforms

Major development platforms integrate then best design

- incremental bases for rapid innovation

Copernicus entering phased sequence of reactor performance experiments

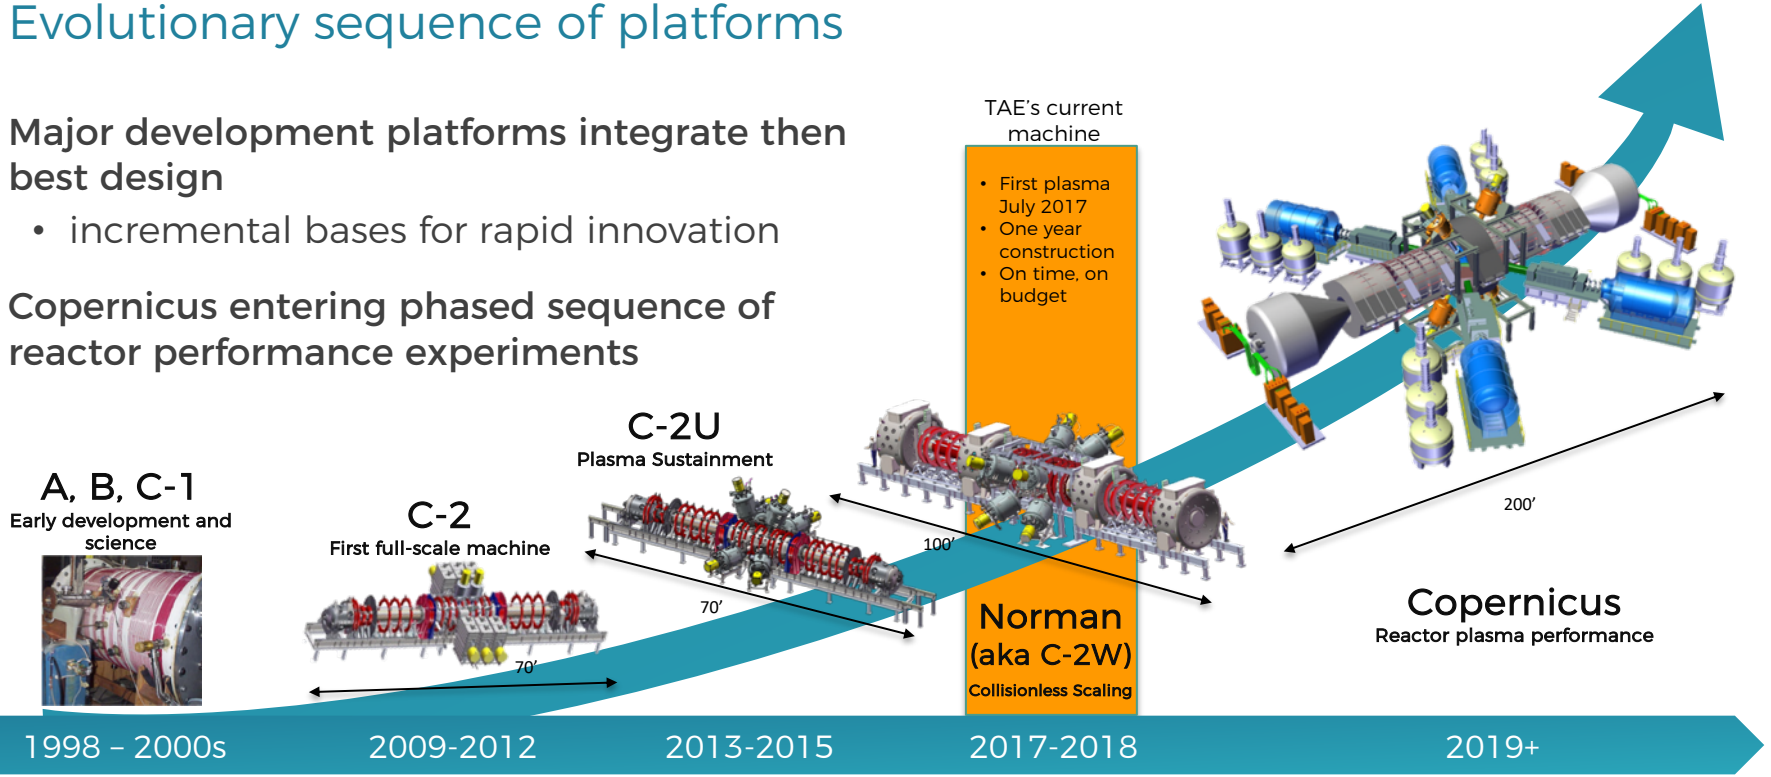

Norman Goals

Explore beam driven FRCs at 10x stored energy compared to C-2U

- Principal physics focus on
  - scrape off layer and divertor behavior
  - ramp-up characteristics
  - transport regimes
- Specific programmatic goals
  - demonstrate ramp-up and sustainment for times well in excess of characteristic confinement and wall times
  - explore energy confinement scaling over broad range of parameters
    - core and edge confinement scaling and coupling
    - consolidated picture between theory, simulation and experiment
  - develop and demonstrate first order active plasma control

tae

Norman (aka C-2W)

TAE's 5th generation machine

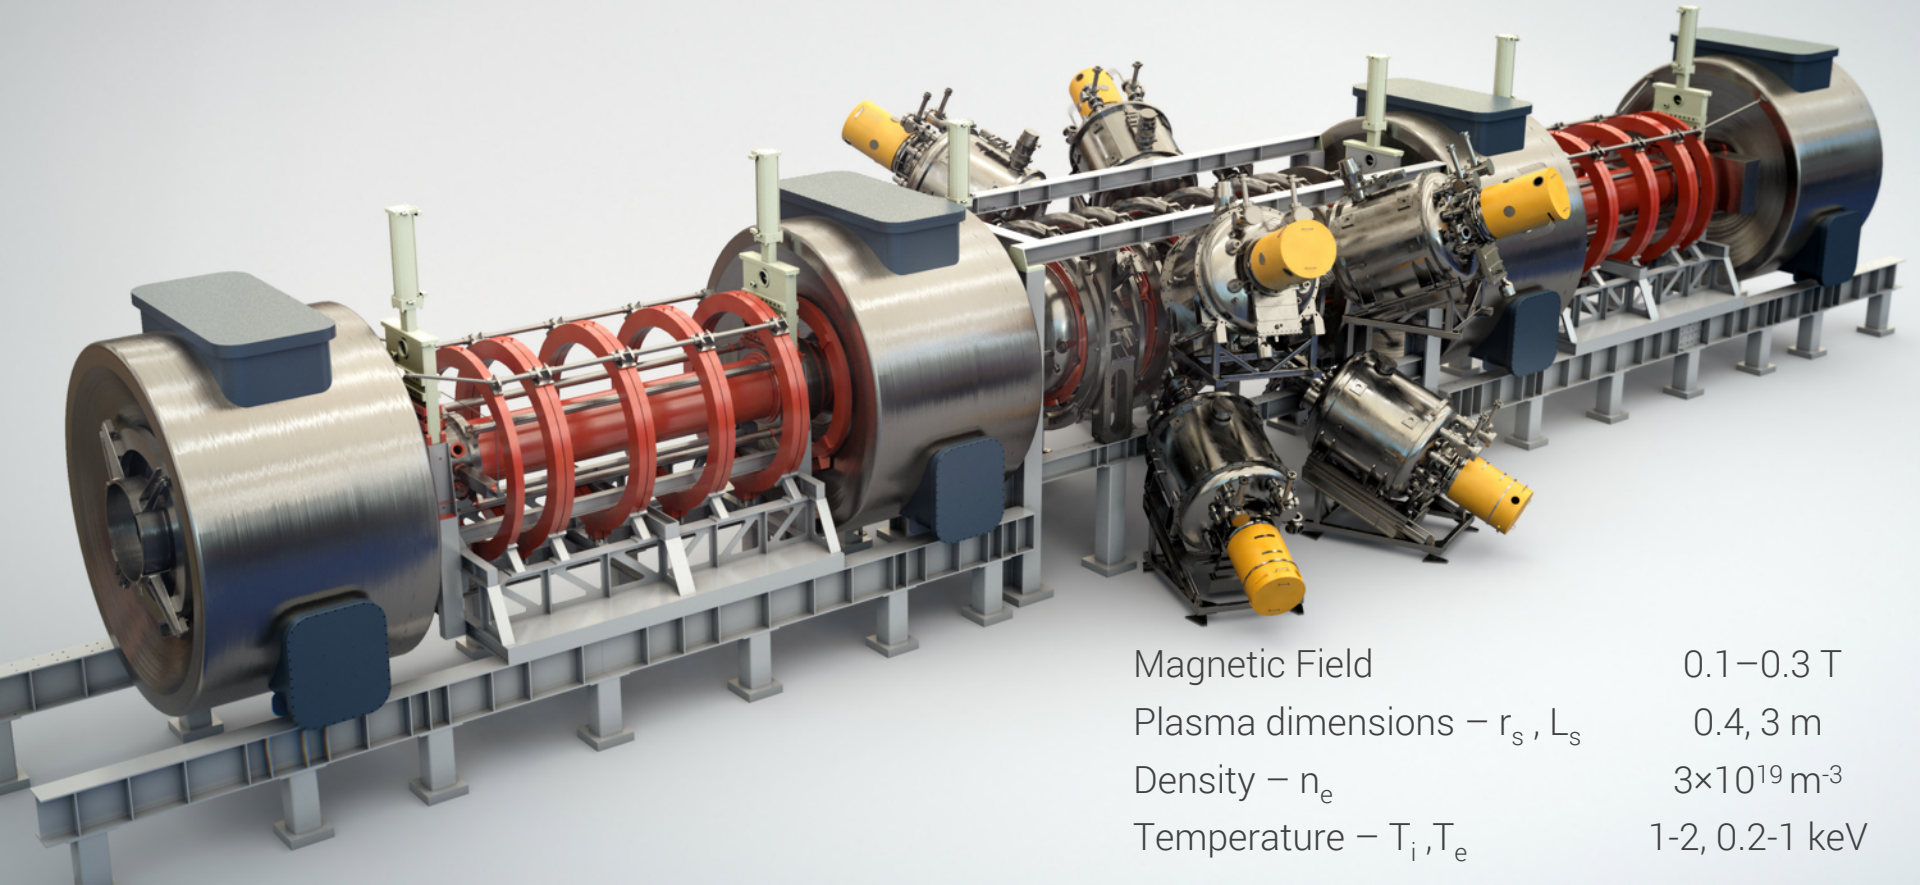

Magnetic Field	0.1–0.3 T
Plasma dimensions – r_s , L_s	0.4, 3 m
Density – n_e	3×10^{19} m^{-3}
Temperature – T_i ,T_e	1-2, 0.2-1 keV

Norman – Neutral Beam System

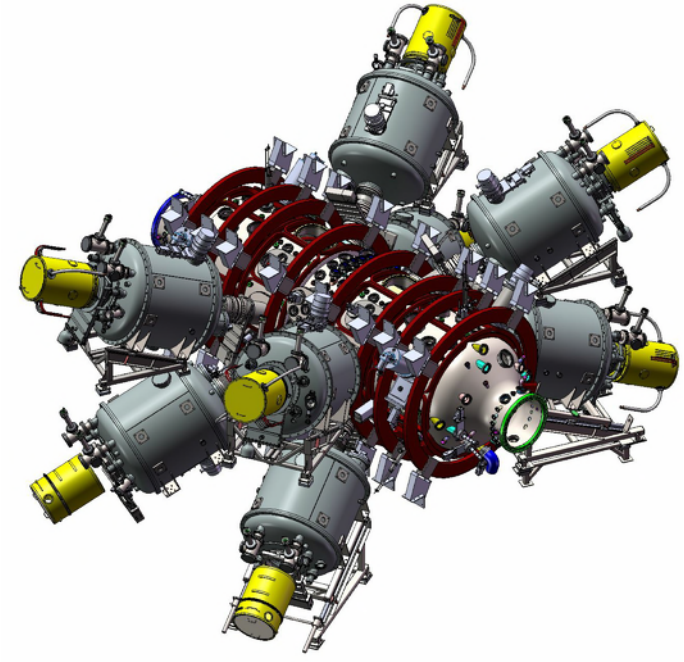

	C-2U	Norman Phase 1	Norman Phase 2
Beam Energy, keV	15	15	15/15-40
Total Power	10	13	21
# of Injectors	6	8	4/4
Pulse, ms	8	30	30
Ion current per source, A	130	130	130

- Centered/angled/tangential neutral-beam injection
  - angle adjustable in range of 15°–25°
  - injection in ion-diamagnetic (co-current) direction
- High current with low/tunable beam energy
  - reduces peripheral fast-ion losses
  - increases core heating / effective current drive
  - rapidly establishes dominant fast-ion pressure for ramp-up

Norman Plasma Lifetime Trends

Expected increase commensurate with vacuum performance

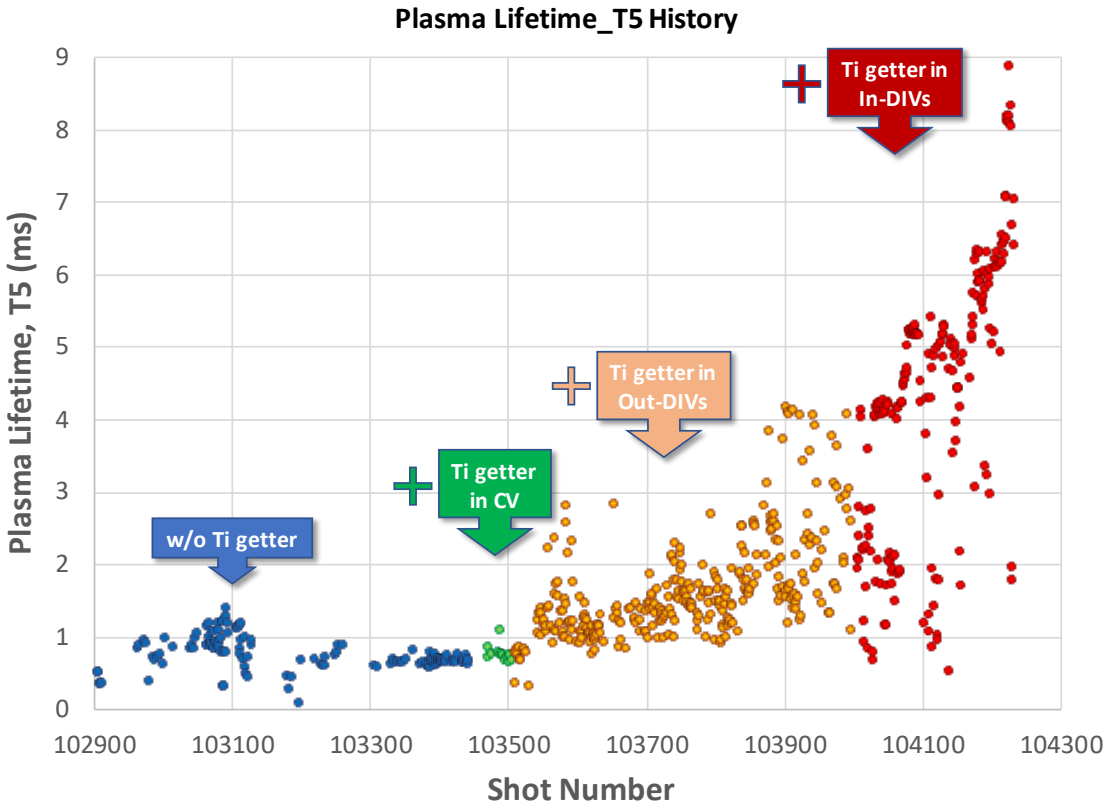

Norman Plasma Temperature Trends

Continuous improvement in total temperature

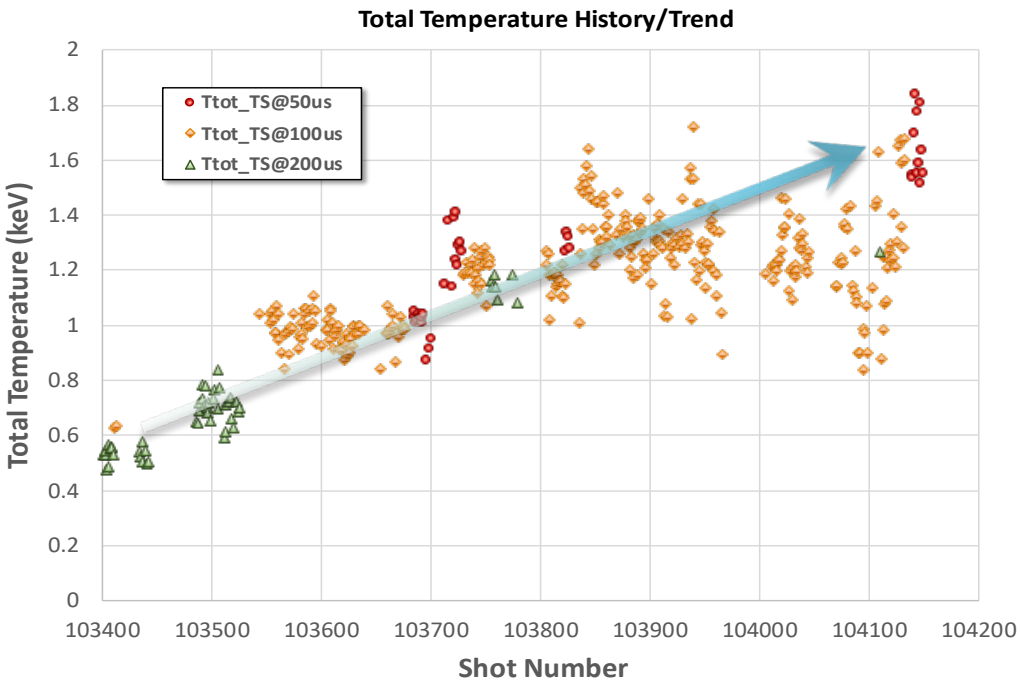

Total temperature (ion+electron) consistently increasing

- lower impurity radiation losses
- more efficient beam coupling
- better confinement

Early temperature moving to 2 keV

- higher energy formation section
- better pre-ionization

Increasing FRC performance over time

Where will TAE be post Norman

Basic proof of scientific feasibility established, meaning

- Transport scaling established for collisionless regime
- Macroscopically stable operation
- Active feedback control established and demonstrated
- Heating and current drive established and demonstrated
- Open field line/SOL/divertor thermal insulation demonstrated

Overall system integration principles and control system know-how established

tae

Key reactor readiness work post Norman (1/2)

- Multi species plasmas validation involving H-B11 mix
- Ash removal validation
- First wall design and material development
- Further RF heating development
- Further fueling development
- Critical system component validation and engineering - magnets, beams, etc.

tae

Key reactor readiness work post Norman (2/2)

- DC performance of all systems
- Heat removal systems
- Energy conversion system design - thermal, direct conversion
- Overall system engineering
- Regulatory/licensing work
- …

Overall Perspective Forward

Fusion Goals and Opportunity

- Start with End in Mind – applied product
- Clean and safe power generation asset
- Competitive with present energy sources
    - LCoE of $\lesssim$ 8 ¢/kWh, overnight cost of $\lesssim$ $5,000 per kW
- Minimized regulatory burden
- Clear market opportunity <u>now</u> (even vis-a-vis renewables + storage)

tae

How do we get there (1/2)

- Sense of urgency
- Broad target approach
  - Take advantage of advances in one concept to bootstrap others
- Look at (parallel) technology evolutions that tilt equation in our favor
- Re-evaluate scale needed now and at full power plant
  - Smaller devices are cheaper, faster to built, easier to rebuild, etc
- Pool with stakeholders that may only have partial overlap with fusion
  - Attract more funding by building larger community
  - Critical mass to move public policy

tae

How do we get there (2/2)

- Innovate fast
  - Don't be afraid of failure – learn by breaking things
  - Iterating is essential to fast progress
  - Generate volume of data necessary to apply AI and machine learning
- Public-private partnership
  - Involve industrial and private sector early
  - Helps to recalibrate goals
  - Introduces private sector thinking and customer needs

tae

How TAE accelerates innovation

- Build platforms with opportunities for fast cycles of learning
- Strategic partnerships to pool talents/resources
  - Traditional fusion partners – universities and national labs
  - Outside of typical fusion efforts – Google, utilities/EPRI, industrial sector
- Deploy advances in machine learning and AI
  - Operational optimization
  - Feedback control – assessing and driving “patterns” might be good enough
- Aim for aneutronic fuel cycle
- Take advantage of forcing function provided by private capital
- Spin-off applications – medical, EV, etc – develops early revenue, supply chain

tae

What TAE needs help with (1/2)

Overall

- Collaborate with community to minimize re-learning

Particular areas of support

- First wall Materials and design
- Divertor design and engineering
- RF heating - overdense plasma (high-beta)
- Computational support – codes and computing time

tae

What TAE needs help with (2/2)

Particular areas of support (cont.)

- Diagnostics and sensor development for burning plasma regime
- Magnet system design and possible HTS use
- Overall system engineering support
- Siting and site development
- Tax breaks and incentives
- Regulatory and licensing support

tae


Thank You